

Inter-m wall speakers providing a natural and smooth sound with a variety of It fits to any places that announcements and BGM required such as schools, government office, hotels and etc. And it ensures the quality and durability by acquiring KS certification in the Korea's first.



FEATURES

- High quality speaker driver
- Stylish and sleek design wall speaker
- A design adopted in modern sense
- Sound volume adjustable with attenuator (IWS-03A/10A)

SPECIFICATION


Model	IWS-10/10A	
Type	6.5", Full-range Wall Speaker	
Unit	6.5"	
Power Handling(AES)	10W	
Input Power	100V	10/3W
	70V	-
Impedance	100V	1k/3.3kΩ
	70V	-
	LOW	-
Power Selection	Rotary Switch(A Ver.)	
Frequency Response (-10dB)	220Hz ~ 12kHz	
Sensitivity (1W/1m 300,400,500,600Hz avg.)	90dB	
Maximum SPL	100dB	
Norminal Dispersion (HxV)	120° x 120°	
Input Connector	3P Screw Terminal	
Enclosure Material	HIPS	
Enclosure Color	Black/Ivory	
Grill Material	Jersey	
Grill Color	Black/Ivory	
Weights (Net)	1.1/1.3(10A) kg	
Dimension (Net, WxHxD, mm)	179 x 312 x 109	
Weather Resistant	-	
Certification	-	
Included Accessories	Anchor bolt x 1	

IWS-10/10A(I/B)

Wall
Speaker

TECHNICAL DATA

DIMENSION

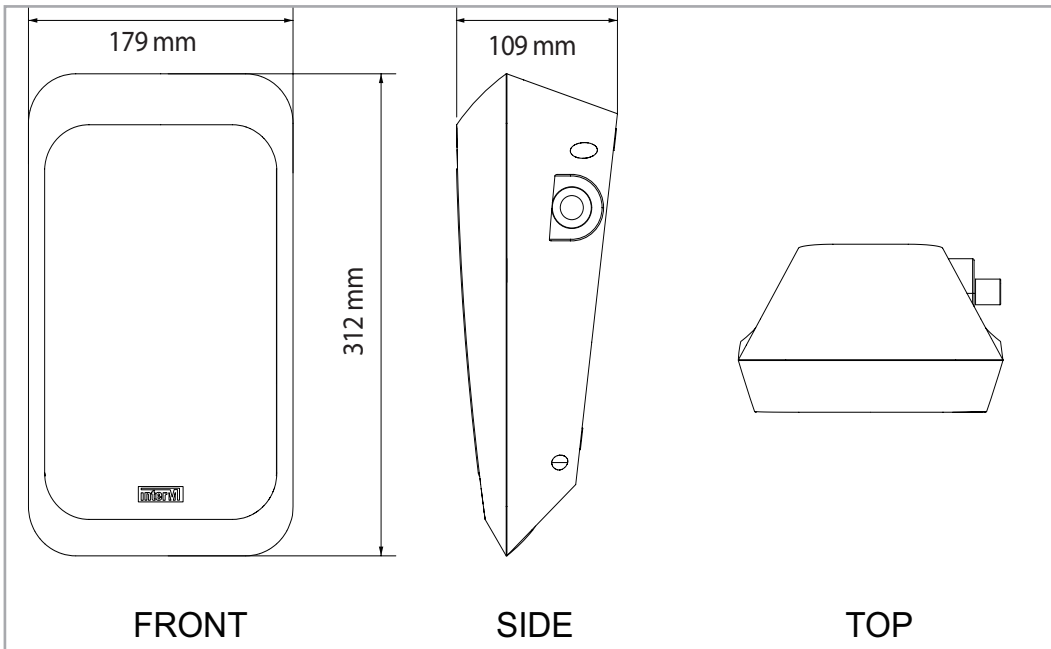

SPEAKER INSTALLATION GUIDE

