



BRAVO INTR

Wireless Control Panel

EN 50131

GRADE 2 Class II

Description

BRAVO INTR is a wireless control panel with built-in power supply unit. The panel is suitable for intruder alarm security and protection of small home and residential sites.

Up to 16 wireless detectors BRAVO series (PIR, MC, FL and FD type) can be enrolled to the panel as every detector represents security of one zone in the site. The BRAVO INTR panel is easy for installation, maintenance and operation, providing to the user two arming modes (Full and Partial), and also remote programming and management via MobileTTE* smart phone application. BRAVO INTR wireless control panel is certified to EN50131, GRADE 2, Class II.

IEC60417-5172 (DB:2003-02).

Technical Specifications

Power supply	100-240VAC; 50-60Hz
Consumption	150mA
Backup power supply (battery)	1 x 3.7V/ 4100mAh, Li-Po type
Operation frequency	868-869Mhz (Adaptive Frequency Agility Algorithm)
Communication type	two-way
Built-in siren	1; 85dB
Operation temperature	-10°C ÷ +40°C
Relative humidity	93% @ +30°C
Dimensions	220 x 160 x 38 mm
Weight	1.376kg
Material	ABS plastic



Functional Specifications

- Quick and easy installation in the protected site
- Tamper switch for self-protection of the box
- Reset jumper for restoring the factory settings
- LED indication for zone and system status
- 16 zones
- 8 remote key fobs
- 1 built-in and 1 outdoor siren
- 300 memory log events
- 2 slots for mounting of optional communication modules

Programming

- **ProsTE** software
- **AjaxWEB*** user interface

Management

- **MobileTTE*** smart phone application
- **AjaxWEB*** user interface

* Note: Requires installer BRAVO GPRS/LAN module to the system configuration.

Contact Information




BRAVO INTR

Wireless Control Panel

EN 50131
GRADE 2 Class II

Operation Diagram

- GPRS/LAN Teletek Electronics communication module and AjaxWEB are a must for Mobile TTE.
- Availability for 24-hour monitoring and intuitive user interface via AJAX SP Cloud Service web application.

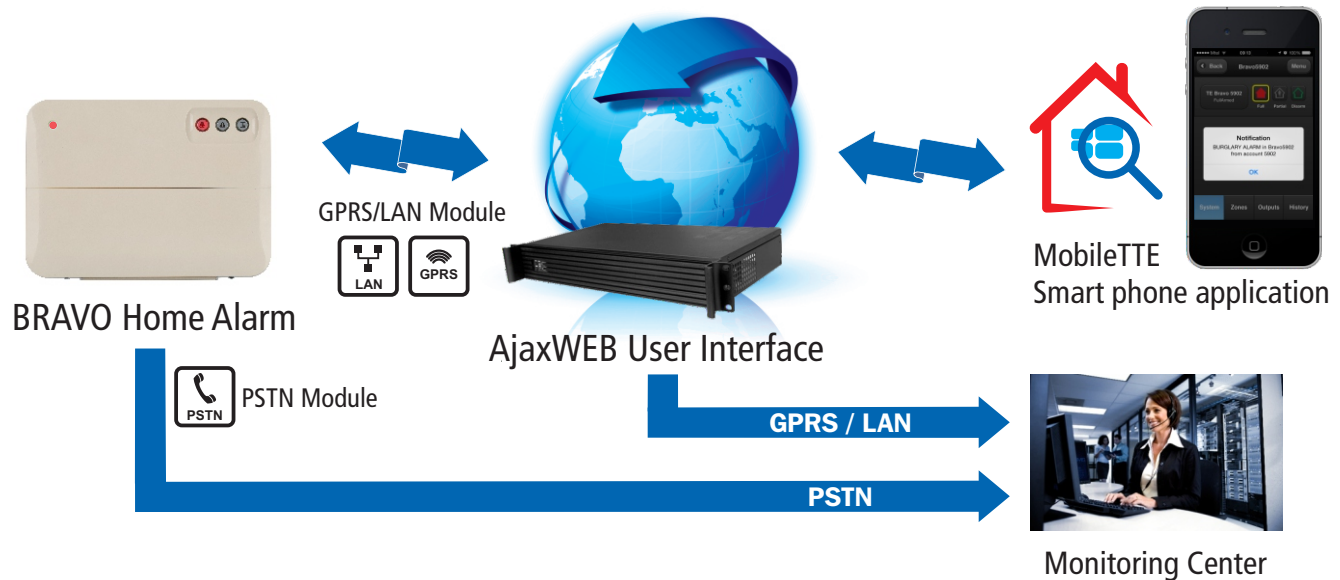

Packing Information

- **Single packing box** - 1 unit BRAVO INTR, dimensions 225 x 167 x 50 mm
- **Master packing box** - 12 units BRAVO INTR, dimensions 500 x 367 x 230 mm

BRAVO KIT SETS

BRAVO INTR wireless panel is available in kit set with a range of wireless devices prepared for direct mounting in the protected site without need of enrolment and other settings. The kits set includes various devices and modules as option.

For more information about the BRAVO kit contents ask for details your local distributor.

Compatible Product Range

- **BRAVO PIR** - Wireless passive infrared motion detector, indoor
- **BRAVO PIR EXT GJD** - Wireless passive infrared motion detector, outdoor
- **BRAVO Curtain** - Combined PIR and MW detector, "curtain" type, outdoor
- **BRAVO MC** - Wireless magnetic contact, indoor
- **BRAVO FL** - Wireless flood detector, indoor
- **BRAVO FD** - Wireless fire alarm combined (optical-smoke and heat) detector, indoor
- **BRAVO RC** - Bi-directional key fob remote control
- **BRAVO RC41** - One-way key fob, 4 buttons
- **BRAVO RC21** - One-way key fob, 2 buttons
- **BRAVO RC11** - One-way key fob, 1 button
- **BRAVO SR200** - Wireless sounder (115dB), outdoor
- **BRAVO SR300 Li** - Wireless sounder (110dB), Lithium battery type, outdoor
- **BRAVO SR300 ALK** - Wireless sounder (110dB), Alkaline battery type, outdoor
- **BRAVO TTE GPRS** - GPRS communication module
- **BRAVO LAN** - LAN communication module
- **BRAVO PSTN** - PSTN communication module
- **BRAVO PSTN VD** - PSTN communication module with voice messaging
- **BRAVO MOUT** - Communication module with outputs (connection to radio transmitter and PGM control)

Contact Information